



Info produs balama hidraulica Biloba EVO Frame toc aluminiu/sticla





Incarcare dinamica maxim 120 kg
Blocare la 180°
Latime usa sticla 800-1200 mm
Grosime sticla 8-21,52 mm




Se pot utiliza doua balamale cu
blocaj Biloba EVO Frame, sau
combinatie de o balama cu blocaj
Biloba EVO Frame si o balama fara
blocaj Biloba EVO Frame SOL

Certificata TÜV conform EN 1154

Balama hidraulica Biloba EVO Frame toc aluminiu/sticla - dimensiuni de gabarit si prelucrare sticla

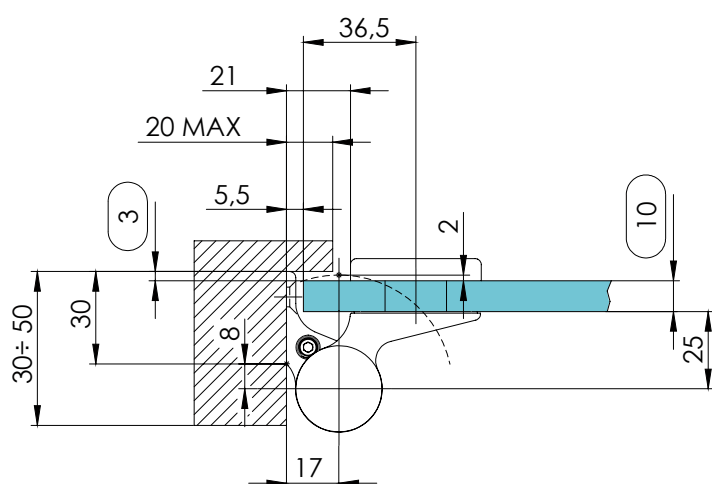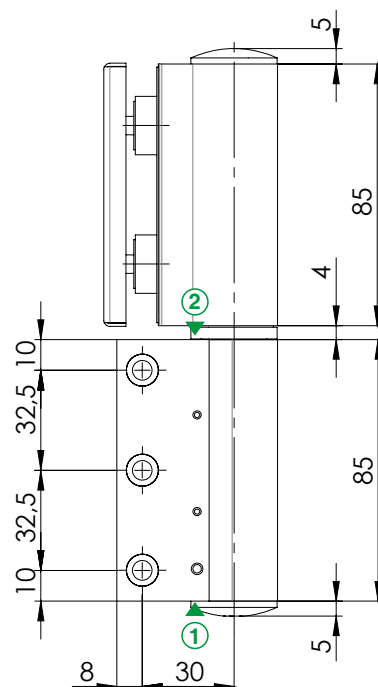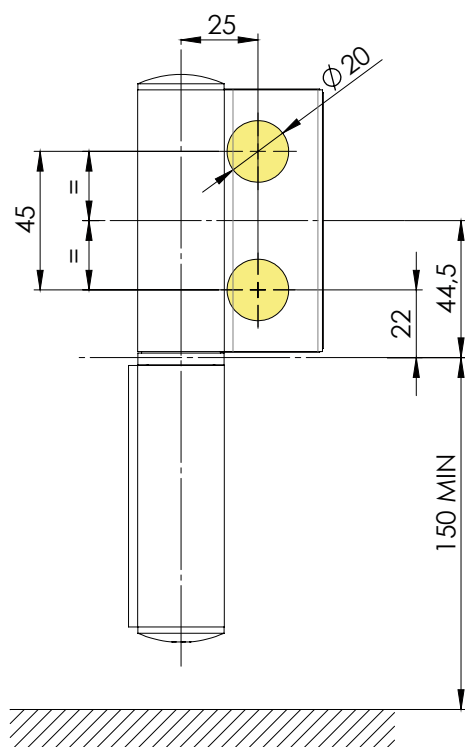

Reglarea vitezei de inchidere
cu declic final



Reglarea vitezei de inchidere
fara declic final