


Latime usa maxim 1100 mm  
 Viteza de inchidere ajustabila prin 2 valve in intervalul 180°-15° si 15°-0°  
 Forta de inchidere EN 2-4 ajustabila




## Amortizor TS Kompakt - detalii constructive si de montaj

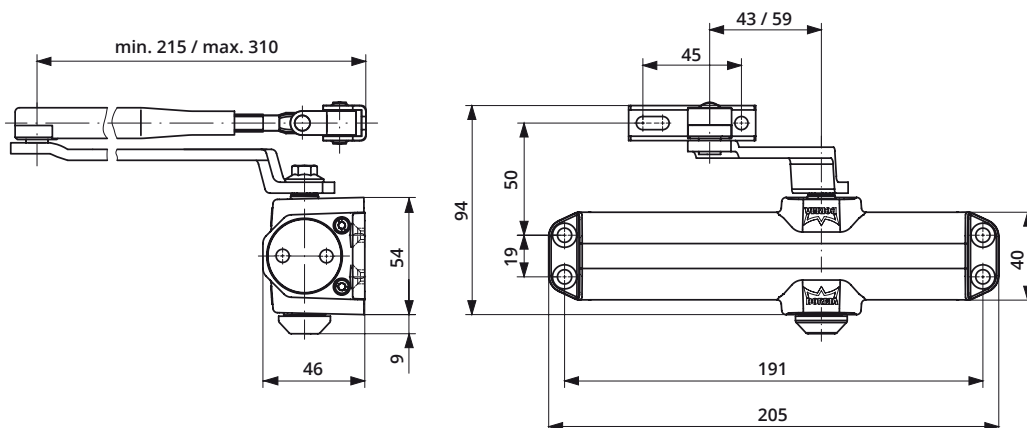

### Montaj pe foaia de usa - deschidere prin tragere

|   | Size 2 | Size 3 | Size 4 |
|---|--------|--------|--------|
| A | 170.0  | 170.0  | 250.0  |
| B | 59.0   | 43.0   | 43.0   |
| C | 96.5   | 96.5   | 176.5  |
| D | 198.5  | 198.5  | 278.5  |
| E | 89.0   | 89.0   | 169.0  |

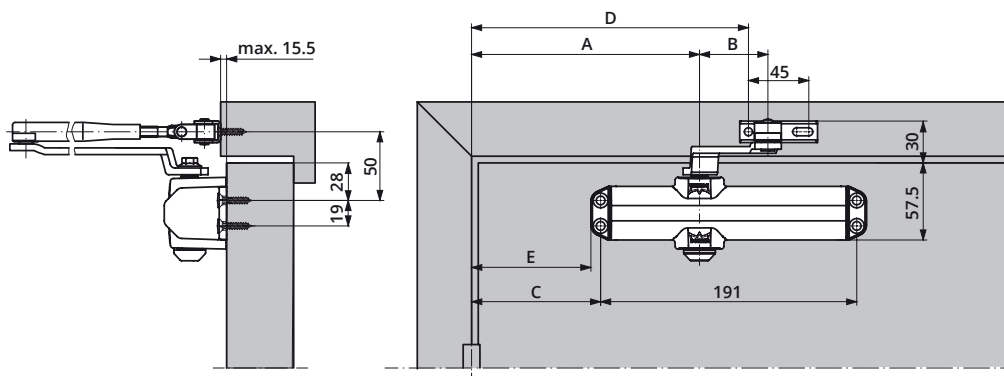

### Montaj pe tocul de usa - deschidere prin impingere

|   | Size 2 | Size 3 | Size 4 |
|---|--------|--------|--------|
| A | 170.0  | 170.0  | 250.0  |
| B | 59.0   | 43.0   | 43.0   |
| C | 96.5   | 96.5   | 176.5  |
| D | 198.5  | 198.5  | 278.5  |
| E | 89.0   | 89.0   | 169.0  |

